


AD Integration flows - Update account

Update

Introduction

Soffid provides a workflow to modify and/or delete an account in the final system. In it, we can see each of the steps of which this process is composed.

Diagram

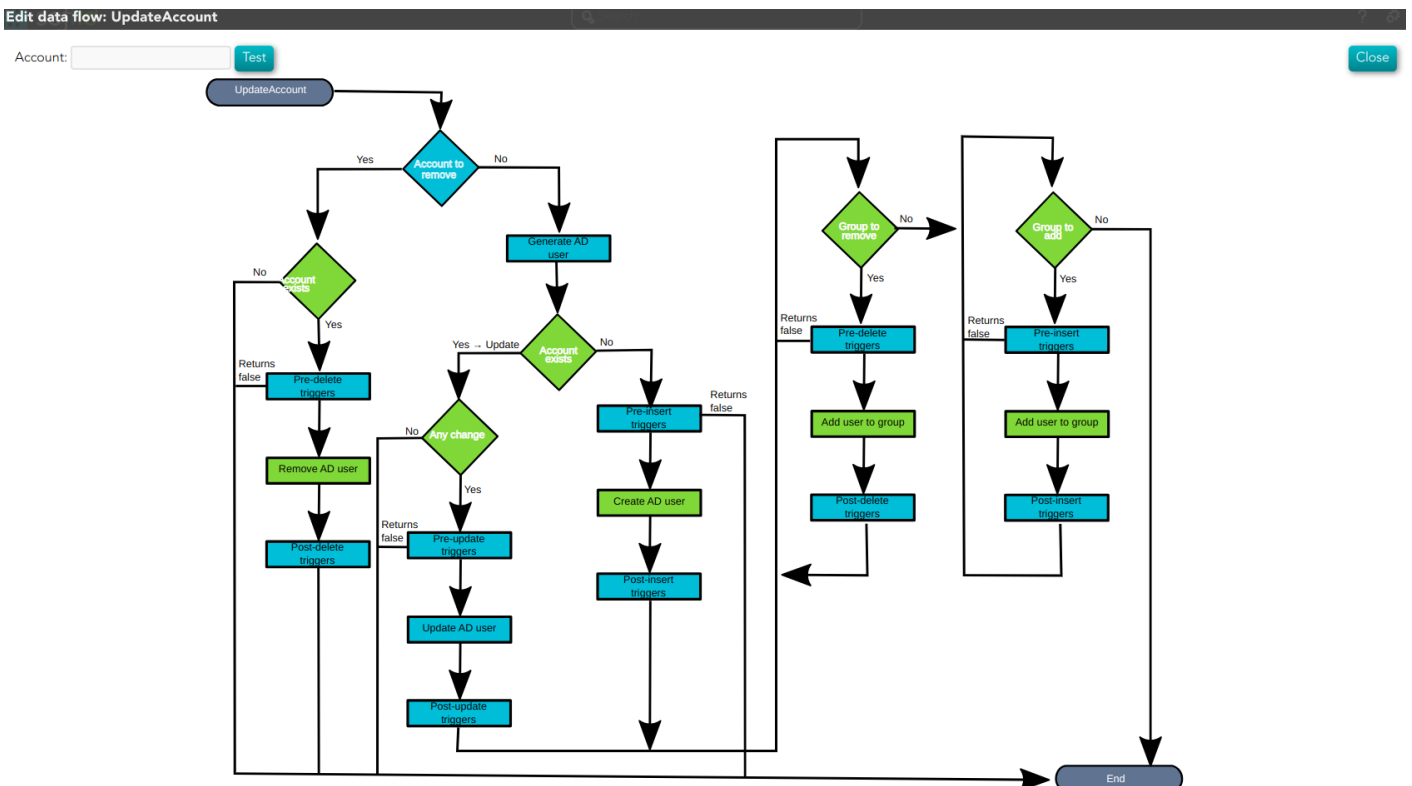


Step by Step

In this document, we will explain the process that Soffid performs to modify an account for the AD connector.

1. Initial step

First of all, Soffid checks if the account exists in Soffid and then checks the operation to perform, update or delete.

1.1. If the **user does not exist in Soffid**, then Soffid asks to delete the user in the target System.

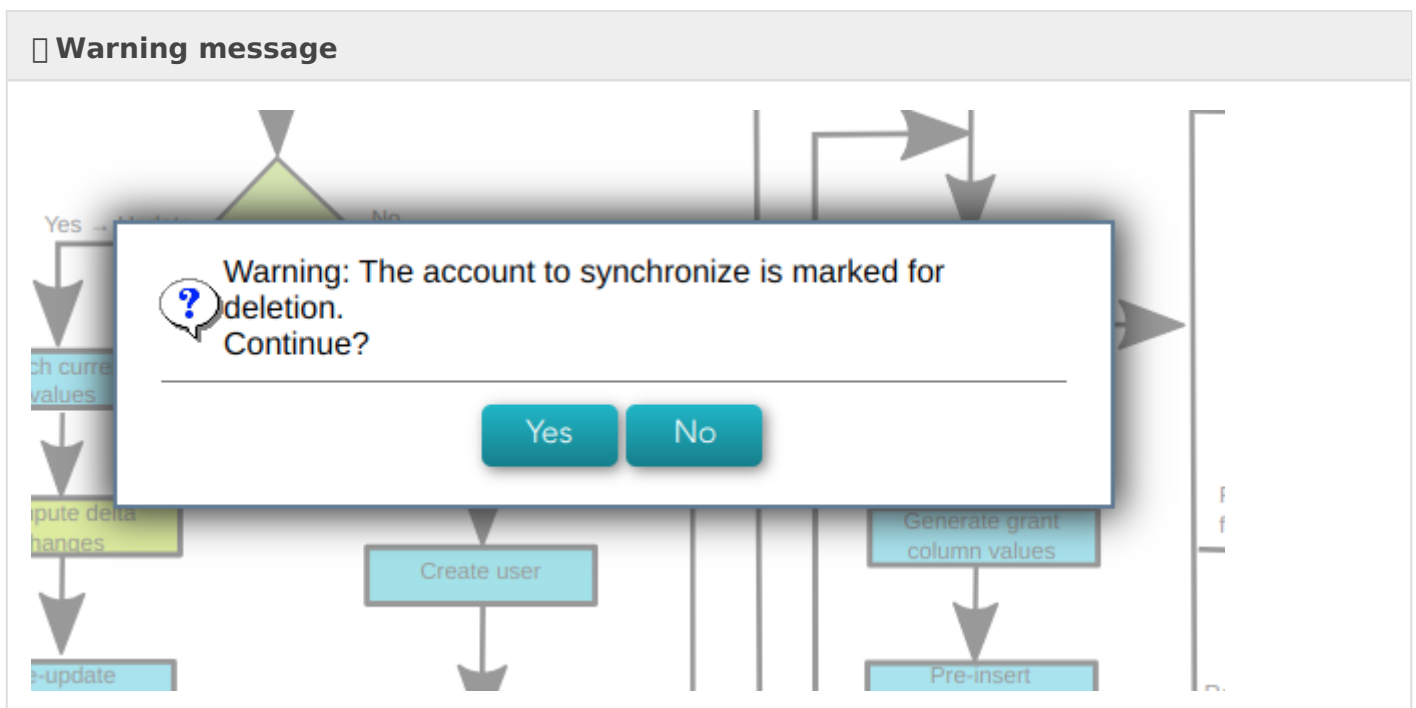

1.1.1. Yes: If the answer is Yes, the process follows through the Yes branch, [3. Delete branch].

1.1.2. No: If the answer is No, the process finishes [10. End].

1.2. If the **user exists in Soffid**, the process continues through [2. User to remove?]. to check if the

2. Account to remove?

☐ By clicking on the Account to remove? step,...

You can configure all the properties related to the account object for this step

MappingProperties


System objects

account based on account

Property	Value	
createDisabledAccounts	false	+ -

2.1. If the account is **marked for Deletion**, Soffid will ask for user consent to continue with the process or to cancel it. If the answer is Yes, the process follows through the Yes branch, [\[3. Delete branch\]](#).


☐ Warning message

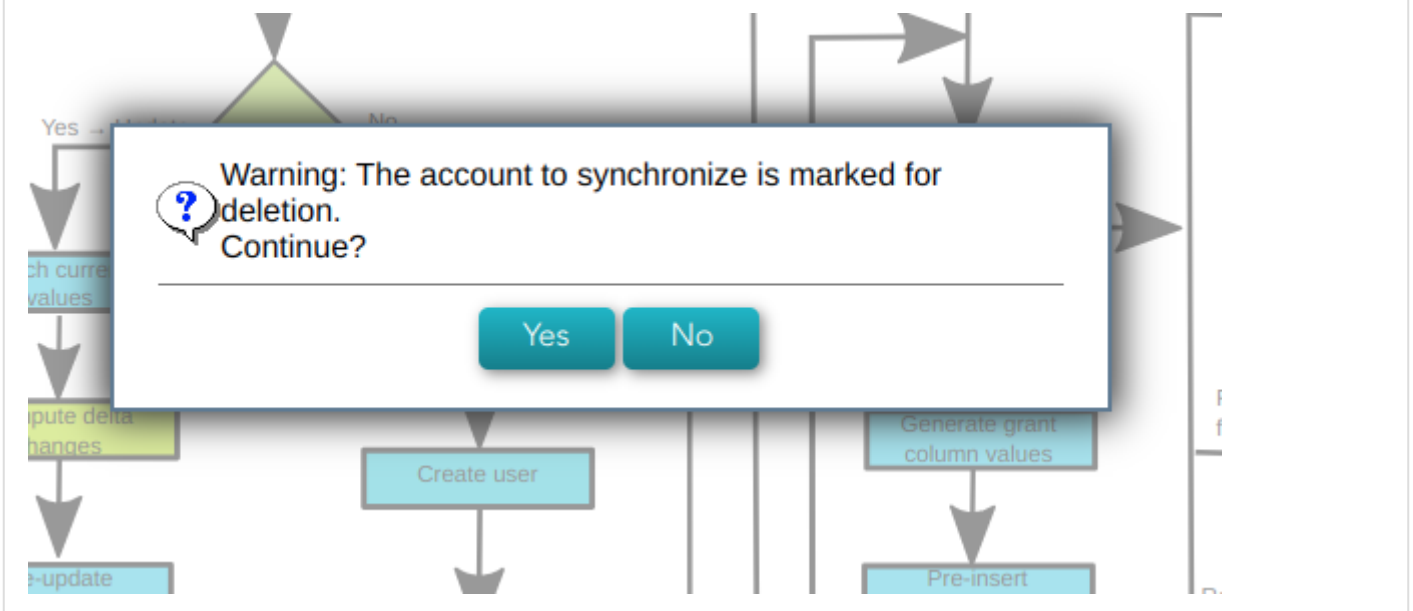

2.2. If the account is **marked for Update**, it continues with the flow following through the No branch, [\[4. Insert or Update branch\]](#).

3. Delete branch

☐ Diagram

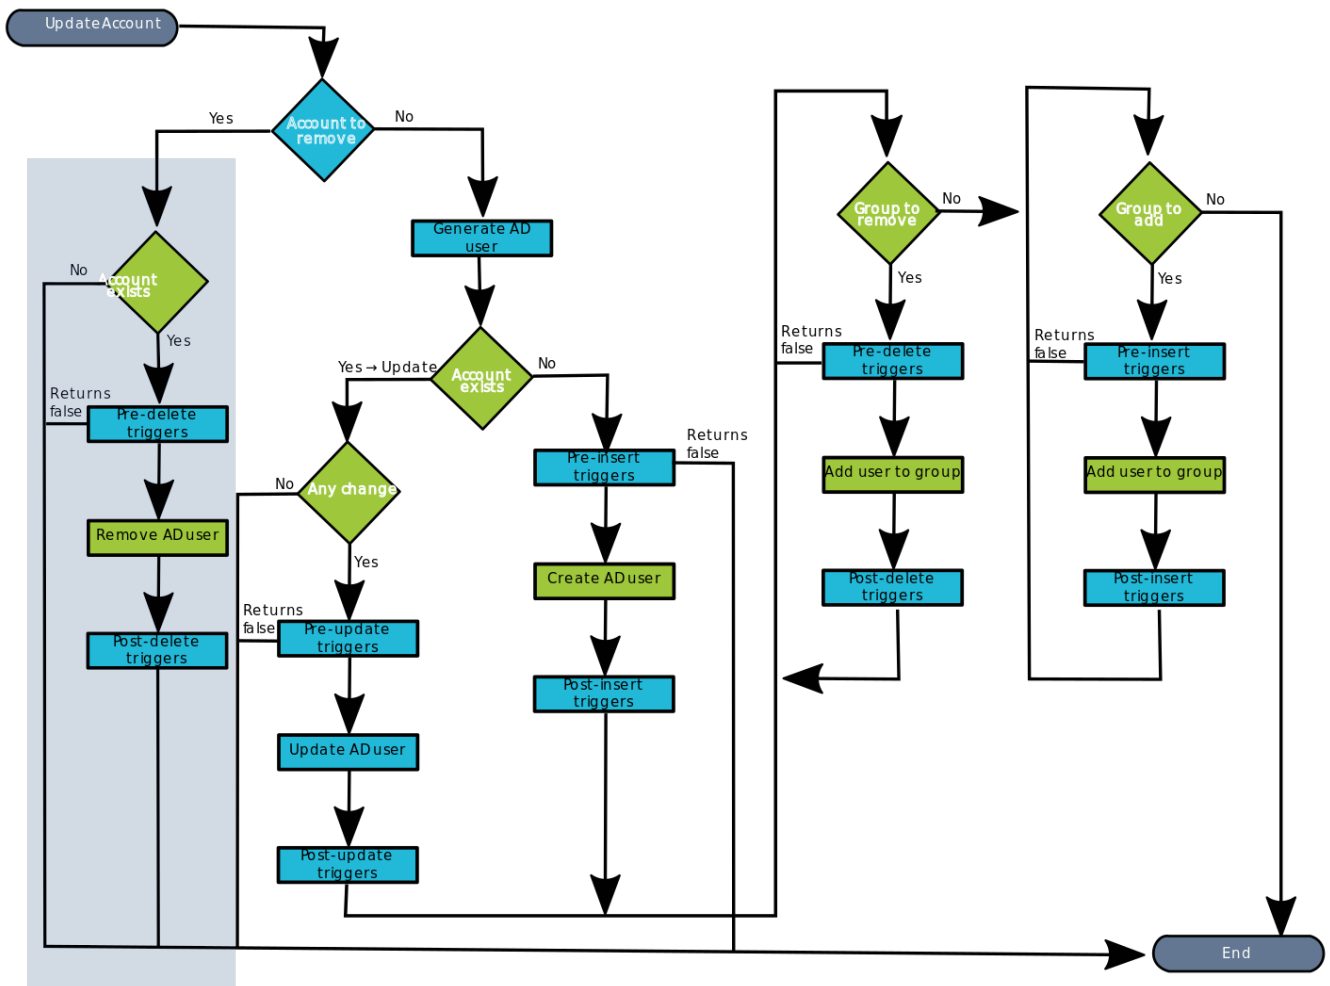

3.1. When the operation to perform is to delete an account, first of all, Soffid has to check if the account exists in the target system.

3.1.1. If the **account does not exist**, there are no actions to perform in the target system, so the process finishes **[10. End]**.

3.1.2. If the **account exists**, the flow continues executing the **pre-delete triggers** if there is anyone configured. More than one script can be configured. These scripts are executed just before the main action, account delete, and the result (true or false) determines if the main action will be performed or not.

3.1.2.1. False: if the result is false for one or more of these triggers, the process finishes **[10. End]**.

3.1.2.2.True: if the result is true for all of these triggers, Soffid continues to the next step.

By clicking on the Pre-delete triggers step,...

You can configure all the pre-delete triggers related to the user object for this step.

Output triggers

System objects

USERS

based on user

Trigger	Script		+
preDelete	userName = source("userName"); attributes = serviceLocator.getService().findUserAttributes(userName);		-
preDelete	return true;		-

3.1.3. Soffid **removes the AD user** in the Active directory.

3.1.3. Then Soffid executes the **post-delete triggers** if any. These triggers can be used to perform a specific action just after performing the remove user operation on the target object.

By clicking on the Post-delete triggers step,...

You can configure the post-delete triggers related to the user object for this step.

Output triggers

System objects

user

based on user

Trigger	Script		+
postDelete			-

3.1.3. Then the process finishes [\[10. End\]](#).

4. Insert or Update branch

4.1. When the operation to perform is to update a user, first of all, Soffid **generates the AD user**. That is, Soffid calculates the values of the AD user object from the original values of Soffid.

By clicking on the generate AD user step,...

You can configure the attributes related to the user object for this step.

Attribute mappings

System objects

user based on user

System attribute	Direction	Soffid attribute
objectClass	←	"user"
relativeBaseDn	←	"OU=" + primaryGroup
givenName	←	firstName
cn	←	fullName
sn	←	lastName
department	←	primaryGroup
sAMAccountName	←	userName

Test


4.2. Then Soffid asks if the **user exists** in the target system to decide the action to execute, this action can be an update or an insert.

4.2.1. If the **user does not exist** in the target system, the process continues through [\[5. Insert user branch\]](#).

4.2.2. If the **user exists** in the target system, the process continues through [\[6. Update user branch\]](#).

5. Insert user branch

Diagram

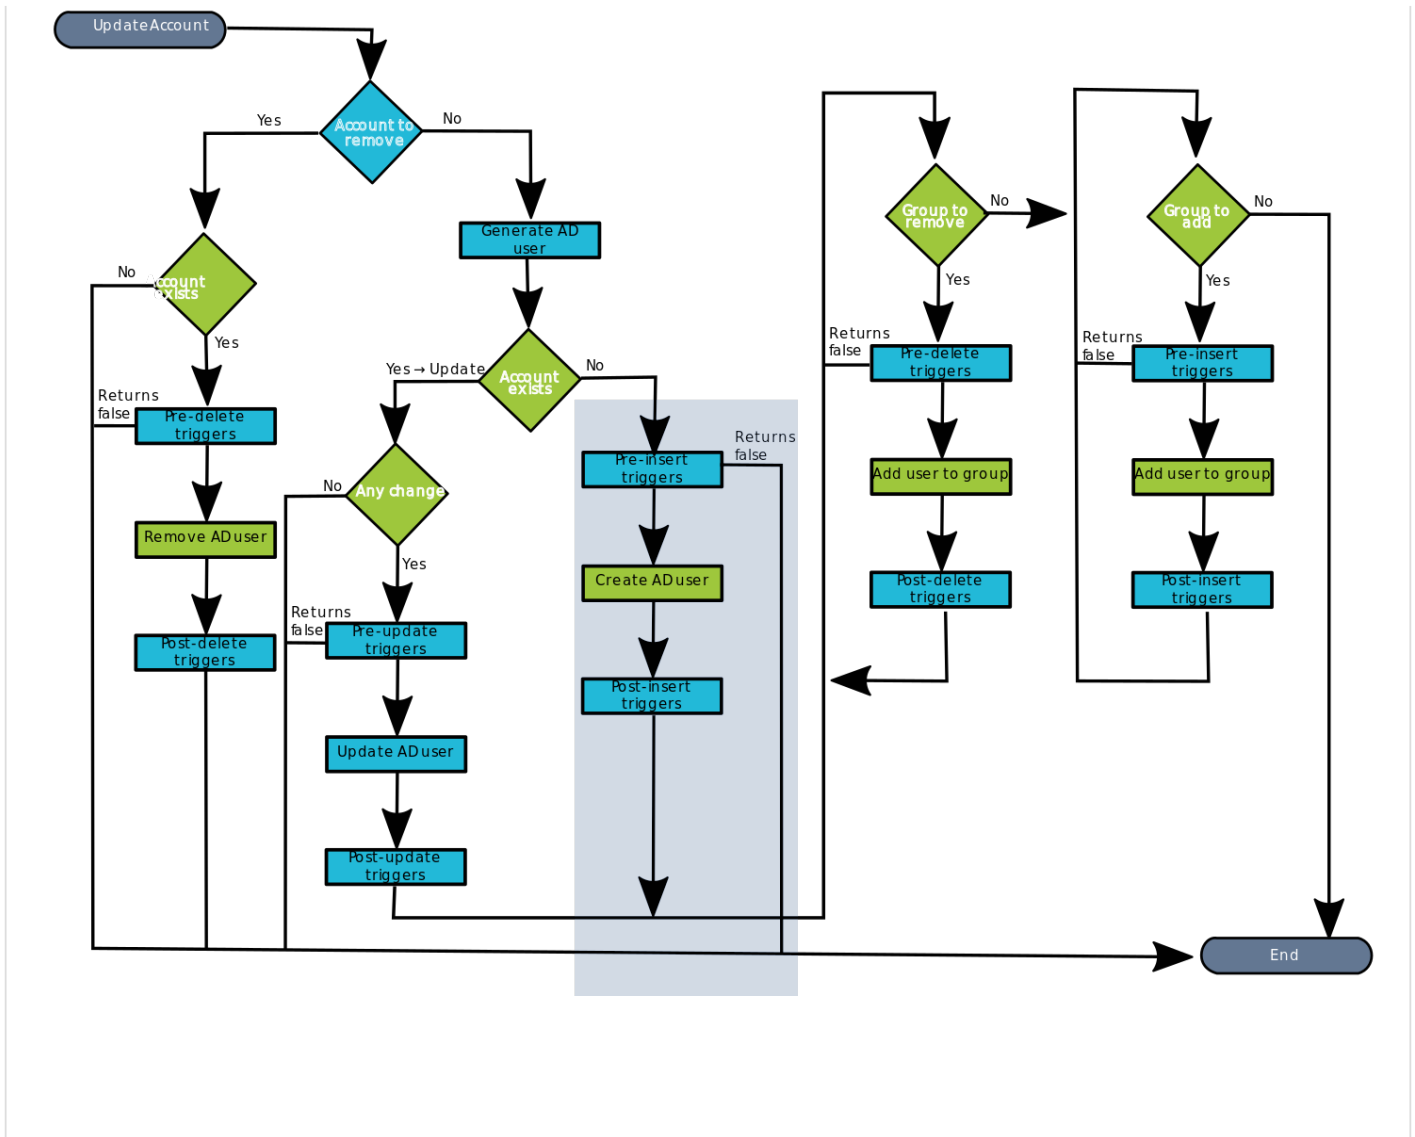

5.1. Soffid executes the **pre-insert triggers** if there is anyone configured. More than one script can be configured. These scripts are executed just before the main action, user creates, and the result (true or false) determines if the main action will be performed or not.

5.1.1. False: if the response is false for one or more of these triggers, the process finishes [10. End] and the user is not created in the target system.

5.1.2. True: if the response is true for all of these triggers, Soffid continues to the next step.

5.2. Soffid **creates AD user** in the Active directory

5.3. Then Soffid executes **post-insert triggers** if any. These triggers can be used to perform a specific action just after performing the create user operation on the target object.

By clicking on the Post-insert triggers step,...

You can configure the Post-insert triggers related to the user object for this step.

Output triggers

System objects


USERS based on user

Trigger	Script
postInsert	

5.4. Then the process continues through [\[7. Groups\]](#).

6. Update user branch

Diagram

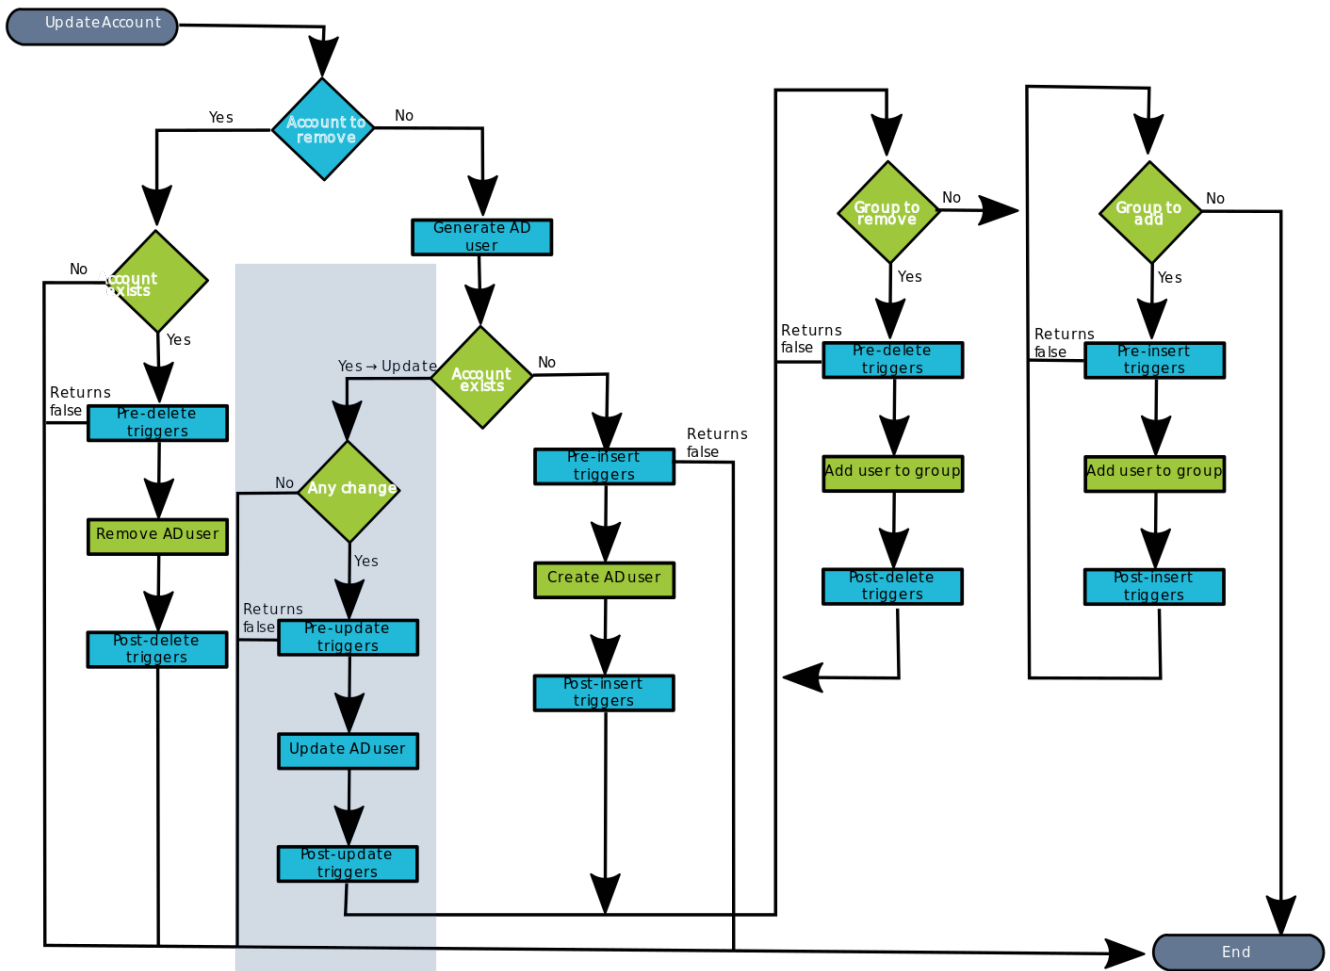

6.1. Soffid checks if there are **any change** between the generated object and the values of the object in the target system.

6.1.1. False: if there are no changes, the process finishes [\[10. End\]](#).

6.1.2. True: if there are changes to update, Soffid continues to the next step.

6.2. Soffid executes the **pre-update triggers** if there is anyone configured. More than one script can be configured. These scripts are executed just before the main action, user update, and the result (true or false) determines if the main action will be performed or not.

6.2.1. False: if the response is false for one or more of these triggers, the process finishes [\[10. End\]](#) and the user is not updated in the target system

6.2.2. True: if the response is true for all of these triggers, Soffid continues to the next step.

By clicking on the Pre-update triggers step,...

You can configure the Pre-update triggers related to the user object for this step.

Output triggers

System objects

USERS based on user

Trigger	Script	
preUpdate	userName = source("userName"); attributes = serviceLocator.getUserService().findUserAttributes(userName);	

6.3. Soffid updates the AD user in the Active directory

By clicking on the update user step,...

You can configure the properties related to the user object for this step.

MappingProperties

System objects

user based on user

Property	Value	
rename	false	

6.4. Then Soffid executes the **post-update triggers** if any. These triggers can be used to perform a specific action just after performing the update user operation on the target object.

By clicking on the Post-update triggers step,...

You can configure the Post-update triggers related to the user object for this step.

Output triggers			
System objects			
user	based on user		
Trigger	Script		
postUpdate			


6.6. Then the process continues through [\[7. Grants\]](#).


7. Grants

At this point, Soffid runs the actions relative to the grants. The operations can be to add the user to one or more groups or to remove the user from existing groups.

8. Group to remove

This is a loop while there are groups to remove.

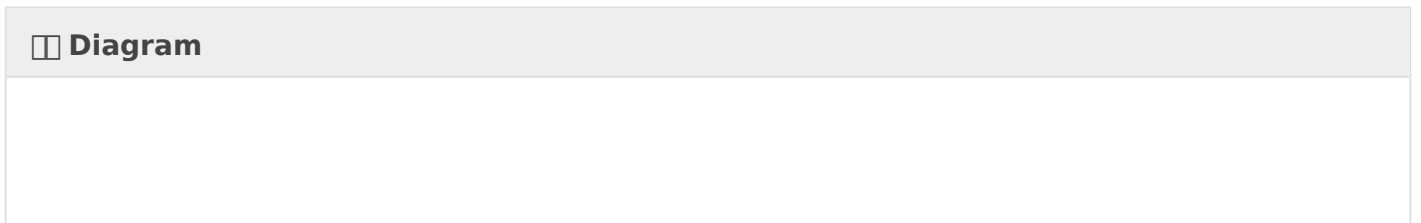

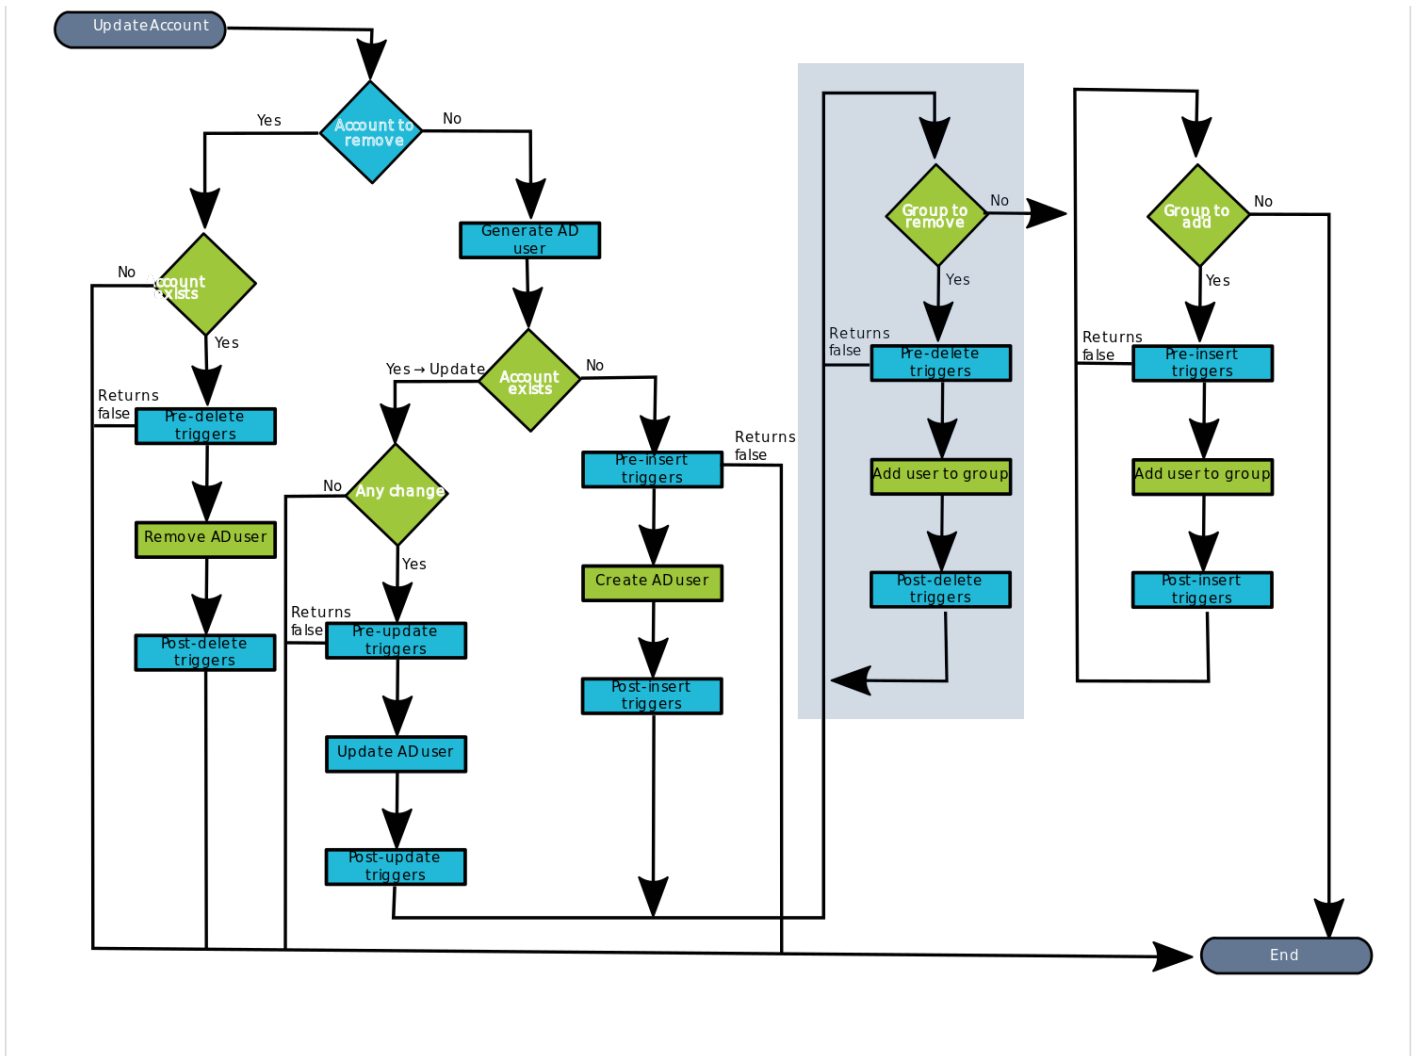

8.1. If there are **No** groups to remove, the process goes to [9. Group to add].

8.2. **Yes**, there are groups to remove:

8.2.1. Soffid executes the **pre-delete triggers** if there is anyone configured. More than one script can be configured. These scripts are executed just before the main action, a **Remove user to group**, and the result (true or false) determines if the main action will be performed or not.

8.2.1.1. **False**: if the response is false for one or more of these triggers, the process goes to [8. Group to remove] and the grant is not created.

8.2.1.2. **True**: if the response is true for all of these triggers, Soffid continues to the next step.

By clicking on the Pre-delete triggers step,...

You can configure the Pre-delete triggers related to the grant object for this step.

Output triggers

System objects				+
based on grant				-
Trigger	Script			+
preDelete	return true;			-

8.2.3. If the result of the triggers is true, then Soffid **adds the user to a group**.

8.2.4. Then Soffid executes the **post-insert triggers** if any. These triggers can be used to perform a specific action just after performing the create grant operation on the target object.

By clicking on the Post-delete triggers column values step,...

You can configure the Post-Update related to the grant object for this step.

Output triggers

System objects				+
based on grant				-
Trigger	Script			+
postDelete				-

8.2.5. Then the process continues through [\[8. Grant to add\]](#).

9. Group to add

Diagram

By clicking on the pre-delete trigger step,...

You can configure the Pre-delete triggers related to the grant object for this step.

Output triggers

System objects

USER_ROLES based on grant

Trigger	Script		
preDelete	if (grantedRole.equals("admin")) return true; else return false;		

9.2.2. If the result of the triggers is true, then Soffid **adds the user to the group**. This operation can return a true or false result.

9.2.2.1. False: the add action could not be performed and the process check for another grant [\[9. Group to add\]](#).

9.2.2.2. True: the add action could be performed properly. Soffid continues to the next step.

9.2.3. Then Soffid executes the **post-insert triggers** if any. These triggers can be used to perform a specific action just after performing the add grant operation on the target object.

By clicking on the post-insert trigger step,...

You can configure the Post-insert triggers related to the grant object for this step.

Output triggers

System objects

USER_ROLES based on grant

Trigger	Script		
postDelete	grantedRole = source("grantedRole"); if (grantedRole.equals("admin")) return true;		

9.2.4. Then the process continues through [\[9. Group to add\]](#).

10. End

The process finishes and the log is displayed, and you can download it by clicking the *Download* button.

Log detail

Test log

Status: Success

Test log

Filter

8/26/22, 10:05:51 AM INFO Searching for object (&(objectClass=user)(sAMAccountName=administrator)) on domain dc=soffid,dc=pat
⊖ Setting user status (userAccountControl)
8/26/22, 10:05:51 AM INFO Searching for object (&(objectClass=user)(sAMAccountName=bobm)) on domain dc=soffid,dc=pat
8/26/22, 10:05:51 AM INFO Current user status: 512
8/26/22, 10:05:51 AM INFO =====
8/26/22, 10:05:51 AM INFO Updating user data object CN=Bob Marley,CN=Users,DC=soffid,DC=pat
8/26/22, 10:05:51 AM INFO REPLACE userAccountControl = [514]
8/26/22, 10:05:51 AM INFO =====
⊖ Setting group membership
8/26/22, 10:05:51 AM INFO Searching for object (&(objectClass=user)(sAMAccountName=bobm)) on domain dc=soffid,dc=pat
8/26/22, 10:05:51 AM INFO Searching for object (&(objectClass=user)(sAMAccountName=bobm)) on domain dc=soffid,dc=pat
⊖ Running triggers account.preDelete
8/26/22, 10:05:51 AM INFO Removing object CN=Bob Marley,CN=Users,DC=soffid,DC=pat
8/26/22, 10:05:51 AM INFO About to remove CN=Bob Marley,CN=Users,DC=soffid,DC=pat
⊖ Running triggers account.postDelete

Total rows: 21

[Download](#) [Close](#)

Revision #10

Created 26 August 2022 08:11:50

Updated 30 November 2022 12:28:41