Windows Connector

Introduction

Description

This connector implements the LDAPS protocol and it is used to connect the Sync-Server with every server that allows this communication protocol.

Managed System

This connector has been performed to connect to the Active Directory system, it's a fork of our LDAP Connector with custom features.

> For more information to check if your system may be synchronized with this connector you do not hesitate to contact us through our Contact form

Prerequisites

To enable LDAPS in your Active Directory, please read the following guide: SSL access to Active Directory.

It is needed an Active Directory user with full administrator access.

Download and Install

This addon is located in the Connectors section and its name is **Windows (including Active Directory)**.

>

> For more information about the installation process you can visit theAddons Getting started page.

Agent Configuration

Basic

Generic parameters

After the installation of the addon, you may create and configure agent instances.

This addon has 5 available agents:

- Active Directory
- Active Directory Only Passwords
- Simple Windows Agent

> For more information about how you may configure the generic parameters of the agent, see the following link: Agents configuration

Custom parameters

Below there are the specific parameters for this agent implementation, "Active Directory"

- Host name of the domain controller.
- Active Directory distingished name in X500 format. e.g.: dc=soffid,dc=local
- Administrator principal name in X500 format, relative to A.D name. e.g.: cn=Administrator,cn=Users
- Administrator password

Parameter	Description
Hostname	Hostname of the server (or ip)
Base DN (LDAP base DN in Soffid 3)	Base name

Parameter	Description
User name (Principal name in Soffid 3)	User name in DN format, including base name if needed
Password	Password for the user to connect.
Enable debug (only in Soffid 3)	When it is enabled more log traces are printed in the Synchronization Server log
Multi-domain (Manage child domains is Soffid 3)	Allows the domain controller to manage more than one child domain
Create OUs when needed	If you select the Yes option and the OUs do not exist, these OUs will be created in the Active Directory.
Network security (Accepted certificates in Soffid 3)	Values: Only secure connections Secure connections with unknown certificates Insecure connections
Follow referrals	If you select the Yes option, Soffid could follow the references to other systems if Soffid has the proper permissions.
Domains to ignore	Add here the domain controllers to ignore
Create OUs when needed	If you select the Yes option and the OUs do not exist, these OUs will be created in the Active Directory.
Generate flat groups	If this field is ticked, when synchronising a hierarchical structure in Soffid, it will only be generated at a single level in Active Directory
Undelete deleted objects	It allows you to reactivate disabled accounts in Active Directory without losing their history and without creating a new, empty user account in their place. This recovery is limited by the length of time these accounts remain in the operating system’s recycle bin.
Real time load last login attribute	If this is ticked, a process is initiated that retrieves the users’ ‘last login’ attribute at regular intervals
Real time load identity changes	You can check this option to synchronize the identities when Soffid is the authoritative data source. You must enable periodic synchronization.

Attribute mapping

Active Directory connector could manage Users and Groups by using LDAPS protocol.

Properties

Some agents require to configure some custom attributes, you will use the properties section to do that.

To enable it, add the following properties to each object mapping:

Property	Description
key (Sofffid 3)	The AD attribute works as the primary key. Usually, it's the sAMAccountName and can be omitted. In Soffid 4 this attribute in no longer used, the SAMAccountName is always the key
rename	AD agent will always map account and group names to the SAMAccount attribute. BaseDN and cn can be calculated based on user attributes. AD agent is able to move and rename AD objects. If you don't desire users or groups to be renamed or moved, an object property named "**rename**" with the value "**false**" can be added to some object mappings.
searchBase	You can configure it if you want the reconciliation process to search accounts on a directory subtree other than AD root, put a searchBase property with the relative tree to look for. • ou=Usuarios,dc=miempresa,dc=com
searchQuery	You can configure it to filter with a LDAP query the reconciliation objects and load authoritative objects • (&(objectClass=user)(objectCategory=person)) • (&(objectClass=person)(uid=juan.perez)) • (objectClass=device)
createDisabledAccounts (Soffid 4)	Set to true if you want the connector to create disabled accounts in the active directory. By default, disabled accounts are not created until enabled. This property only works for the objects User and Account. Only for Soffid 4
removeDisabledObjects (Soffid 4)	Set to true if you want the connector to remove disabled object in the active directory. By default, disabled object are not removed until enabled. This property only works for the objects User and Account.. Only for Soffid 4

For instance:

Property	Value	+
rename	true	—
searchBase	OU="Soffid"	—

Attributes

You can customize attribute mappings, you only need to select system objects and the Soffid objects related, manage their attributes, and make either inbound or outbound attribute mappings.

Using a windows connector you can map users, groups, and role objects. Active Directory membership is automatically managed based on user and group mappings.

Any object mapping must have the following system attributes:

System attribute	Description
objectClass	Active Directory object class. The following values mostly used "user", "group" or "organizationalUnit"
baseDn	Active Directory container where user or group should be created. Its value should be absolute, containing Active Directory DC parts
relativeBaseDn	Active Directory container where user or group should be created. Its value should be relative to Active Directory DC parts.
cn	Object name

There is a bunch of AD special attributes that need some special treatment:

System attribute	Description
sAMAccontName	Is automatically mapped. It is internally mapped to role name or account name, without further customization

accountExpires	Sets the last date (in nanoseconds since 1600) in which the account will be valid. A common mapping expression is:
	`if ( attributes {"expirationDate"} == null)`
	`  return 9223372036854775807L;`
	`else`
	`  return attributes{"expirationDate"}.getTime() * 10000L + 116445528000000000L;`

samAccountType	Can be used to identify distribution lists. A value of 268435457 or 268435456 means the AD group is a distribution list group rather than a security group.


System attribute	Description


lastLogon	The attribute can be used to get the last time an account was used. Soffid attribute is named **lastLogin** and the right mapping could be the following one. Mind when you make a reference to lastLogon attribute, every domain controller is queried about this attribute, as its value is not replicated across AD controllers:
	`if ( lastLogon == null || lastLogon == void) return null;`
	`Long v = Long.decode(lastLogon);`
	`v = v / 10000000L;`
	`v-=11644473600L;`
	`return new Date(v*1000);`
	`=>`
	`lastLogin`

userCannotChangePassword	true/false This is a virtual attribute that can be used to indicate if a user can or cannot change the password. You can't assign this permission by directly modifying the UserAccountControl attribute.

> For more information about how you may configure attribute mapping, see the following link: Soffid Attribute Mapping Reference

For instance:

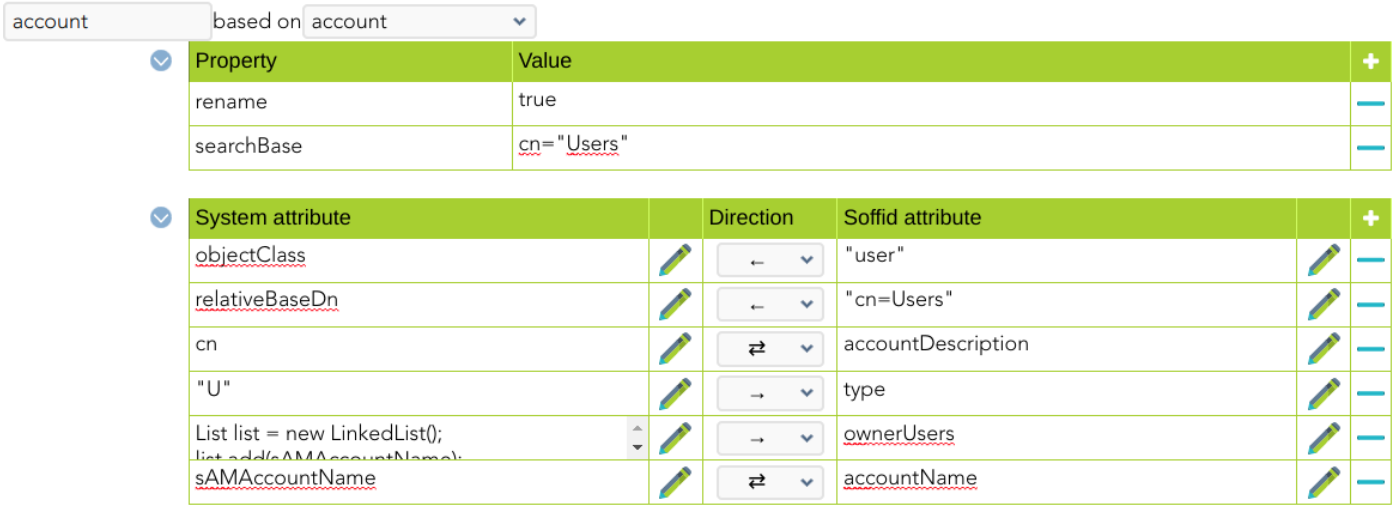

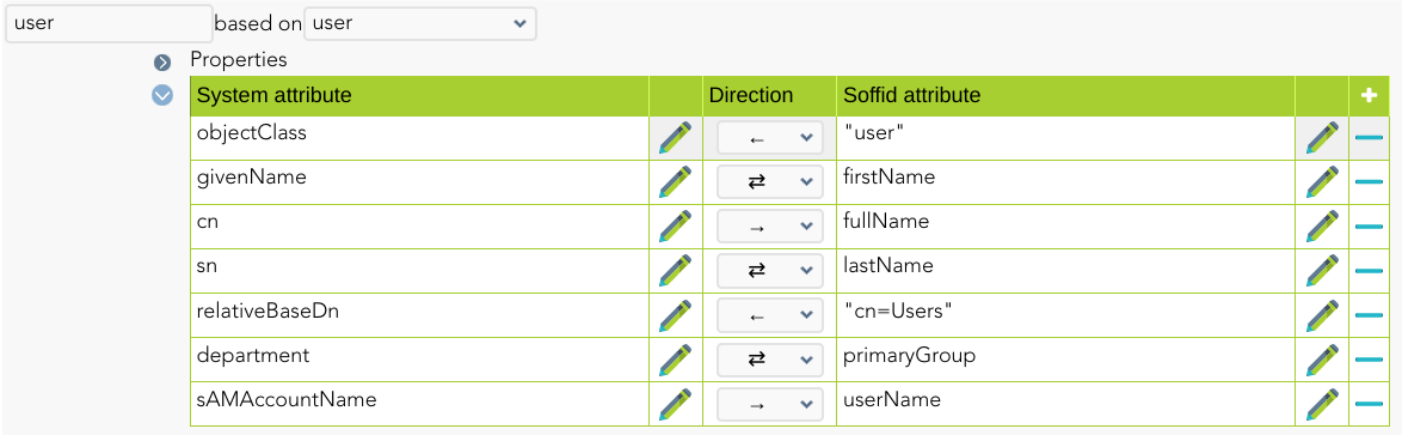

Triggers

You can define BeanShell scripts that will be triggered when data is loaded into the target system (outgoing triggers). The trigger result will be a boolean value, true to continue or false to stop.

Triggers can be used to validate or perform a specific action just before performing an operation or just after performing an operation on target objects.

> To view some examples, visit the Outgoing triggers examples page.

Avoid incremental load authoritative

The Customizable Active Directory connector has an incremental load authoritative process.

When this process is executed, it requests the changes to Active Directory after the **uSNChanged** .

The value of this field is saved in Soffid in the parameter **soffid.sync.authoritative.change.NAME_OF_THE_AGENT**

> If you want to launch a complete load authoritative process, remove this parameter first. At the end of the process, the parameter will be generated automatically.

For more information, go to the Soffid Parameters page.

Password Rotation

When you are configuring password rotation using Windows Connector, it could be necessary to make some changes in the local computar policies.

The Local Computer Policies on the target Windows server mentioned below:

- **User Account Control: Admin Approval Mode for Built-in Administrator Account**
- **User Account Control: Run All Administrator in Admin Approval Mode**

Need to be disabled for PAM application to connect target server and reset password of privilege accounts. If the Policies are originally in ‘Enabled’ mode, then after disabling them a system restart may required for the Policies to get applied on target servers properly.

To check the User Access Policies on servers, follow below mentioned path:
Open group policy editor **Run > gpedit.msc > Local Computer Policy > Windows Settings > Security Settings > Local Policies > Security Options > select policy ‘User Account Control: Run all administrators in Admin Approval Mode’ and ‘User Account Control: Run All Administrator in Admin Approval Mode’ and select Disabled and apply > OK**.

Revision #35
Created 19 April 2021 15:29:26
Updated 7 August 2026 14:59:08 by Sion Vives