

# Holder group


## Introduction

A **Holder Group** can be defined as a logical grouping or collection of entities (referred to as "holders") that share similar characteristics, roles, permissions, or access requirements. The concept of a Holder Group simplifies the management of identities by enabling administrators to apply policies, assign roles, and manage permissions at the group level rather than individually.

## Steps to configure

### 1. Group type

It is necessary to define a **Group type** with Rol Holder to Yes

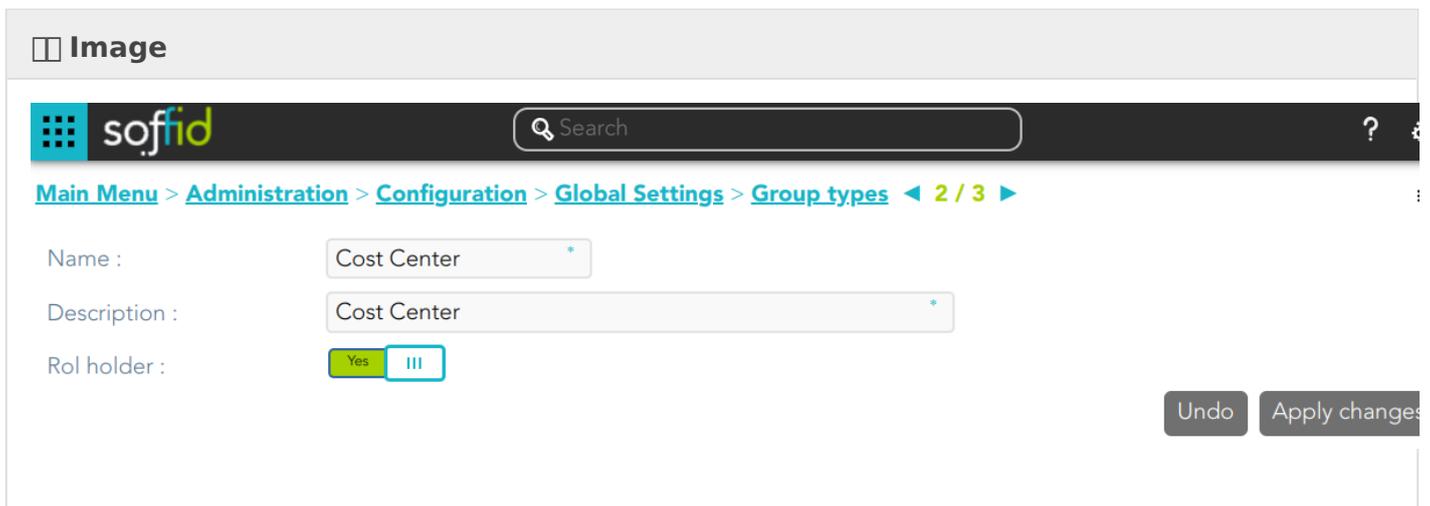

The screenshot shows the Soffid administration interface. At the top, there is a navigation bar with the Soffid logo and a search bar. Below the navigation bar, there is a breadcrumb trail: [Main Menu](#) > [Administration](#) > [Configuration](#) > [Global Settings](#) > [Group types](#) < 2 / 3 >. The main content area displays the configuration for a Group type. The fields are: Name: Cost Center, Description: Cost Center, and Rol holder: Yes. There are buttons for 'Undo' and 'Apply changes' at the bottom right.

<https://bookstack.soffid.com/books/soffid-3-reference-guide/page/group-type>

### 2. Groups

Then, you need to define the groups with this specific group type.



The screenshot shows the top part of the Soffid administration interface, including the navigation bar and the breadcrumb trail. The main content area is partially visible, showing the configuration for a Group type.

**soffid** Search

[Main Menu](#) > [Administration](#) > [Resources](#) > [Groups](#) 1 / 17 ▶

**Basics** Users Granted Roles Managers

Name : RRHH

Description : RRHH

Drive letter : Dri

Parent group : world World

Type : Cost Center Cost Center

Drive server name : Drive server name

Disabled :  No

Created on :

Disabled on :

Undo Apply changes

<https://bookstack.soffid.com/books/soffid-3-reference-guide/page/groups>

### 3. Attribute definition

#### Holder group

**Image**

**soffid** Search

[Main Menu](#) > [Administration](#) > [Configuration](#) > [Web SSO](#) > [Attribute definition](#) 1 / 1

Name : Holder group

ShortName : HolderGroup

Oid : urn:oid:1.3.6.1.4.1.22896.3.1.7

OpenID name : holder\_group

Radius ID : Radius ID

Value : Script to compute the attribute value. By default the original source attribute will be copied

Undo Apply changes

#### Role & group membership

**Image**

**sofid** Search ?

[Main Menu](#) > [Administration](#) > [Configuration](#) > [Web SSO](#) > [Attribute definition](#) 1 / 1

Name : Role & group membership

ShortName : memberOf

Oid : urn:oid:1.3.6.1.4.1.5923.1.5.1.1

OpenID name : meber\_of

Radius ID : Radius ID

Value : Script to compute the attribute value. By default the original source attribute will be copied

Undo Apply changes

#### 4. Attribute sharing policies

You have to define the attribute sharing policies

**Image**

In this case, the Holder group, and Role & group membership attributes will be always shared.

**sofid** Search ?

[Main Menu](#) > [Administration](#) > [Configuration](#) > [Web SSO](#) > [Attribute sharing policies](#) < 2 / 3 >

Policy : GroupMembershipANY

Condition : ANY

Attributes

<input type="checkbox"/>	Attribute	Action	Condition
<input type="checkbox"/>	Filter	Filter	Filter
<input type="checkbox"/>	Holder group	Allow	ANY
<input type="checkbox"/>	Role & group membership	Allow	ANY

Displayed rows: +

Undo Apply changes

#### x. Users

# Use cases

## Login (OpenID Connect or SAML)

1. User with no groups (Primary or secondary) with type holder group Yes. When this user log into an application --> The user login normally to the application
2. User with Primary group RRHH (Type holder group yes) and No Secondary groups with Type holder group yes . When this user log into an application --> The user will be logged-in the application with the group RRHH.
3. User with Primary group RRHH (Type holder group yes) and Secondary group Marketing (Type holder group yes). When this user log into an application --> The user will have to choose the holder group to login the application.

 **Image**

**Select the group in which you need to carry out your activities.**

- RRHH - RRHH department
- Marketing - Marketing department

**Accept**

4. User with any Primary group with Type holder group no, and with some Secondary groups with Type holder group yes. When this user log into an application --> The user will have to choose the holder group to login the application.

 **Image**

**Select the group in which you need to carry out your activities.**

- RRHH - RRHH department
- Marketing - Marketing department

Accept

---

Revision #3

Created 15 January 2025 10:51:59 by pgarcia@soffid.com

Updated 15 January 2025 15:10:19 by pgarcia@soffid.com