OpenIDProfile


Definition

The Identity Provider will serve the OpenID-Connect protocol. It is possible to accept the default endpoints or modify them.

You can check the server features visiting https://<YOUR-IdP>/.well-known/openid-configuration. That JSON gives you information about the oAuth authentication types allowed, the key URL, the soported authentication methods and the info about the endpoints defined.

> You can download an example openid-configuration.json

Screen overview

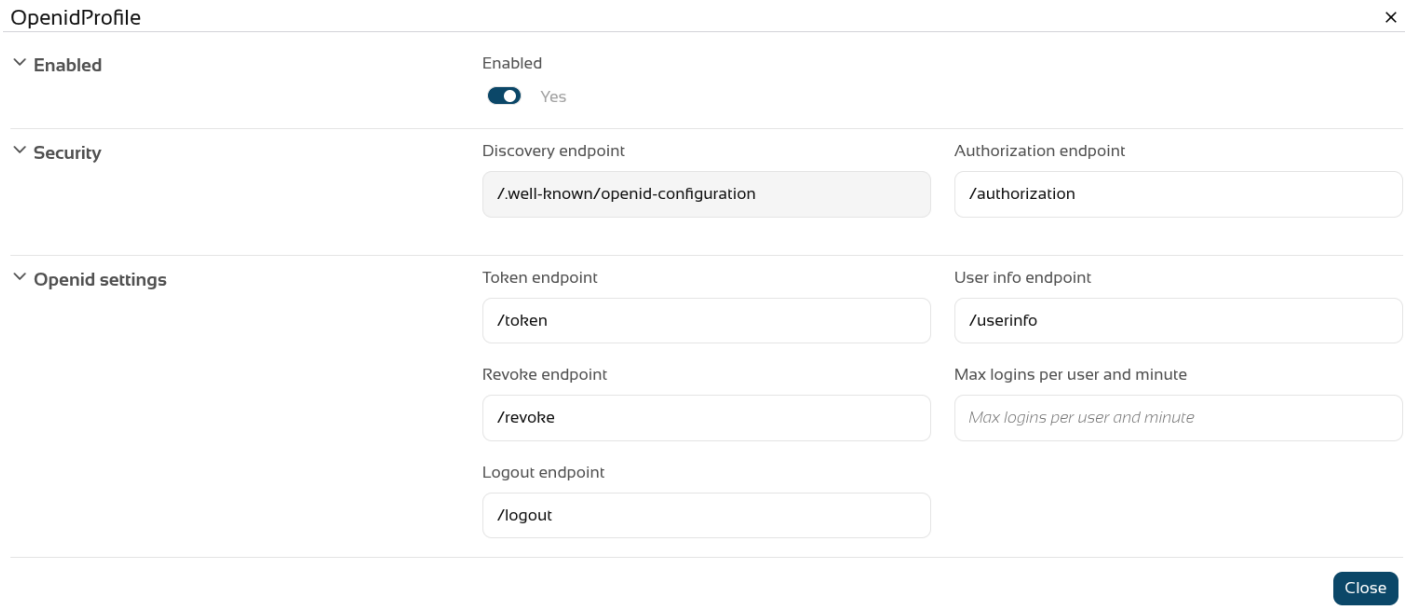

Standard attributes

- **Enabled**: if it is checked (selected option is Yes) that protocol will be enable.

- **Discovery endpoint**: call this endpoint to request the OpenID-Connect provider metadata.
- **Authorization endpoint**: call this endpoint to request or authorization grant.
- **Token endpoint**: call this endpoint to get the token or to renew the token.
- **User info endpoint**: call this endpoint to request user information.
- **Revoke endpoint:** call this endpoint when you finish and do not need more use the token.
- **Max logins per user and minute**: limits the number of requests a user can make to an OpenID Connect service provide. Check the new feature 2026-07-20 New feature: configure maximum openid logins.
- **Logout endpoint**: call this endpoint to close the session with the service provider

---

Revision #13
Created 14 September 2021 11:10:28
Updated 7 August 2026 09:56:01 by Sion Vives