
Steps to configure


Steps to configure

1. **Group type:** Create at least one organizational unit with the role holder attribute active (yes).

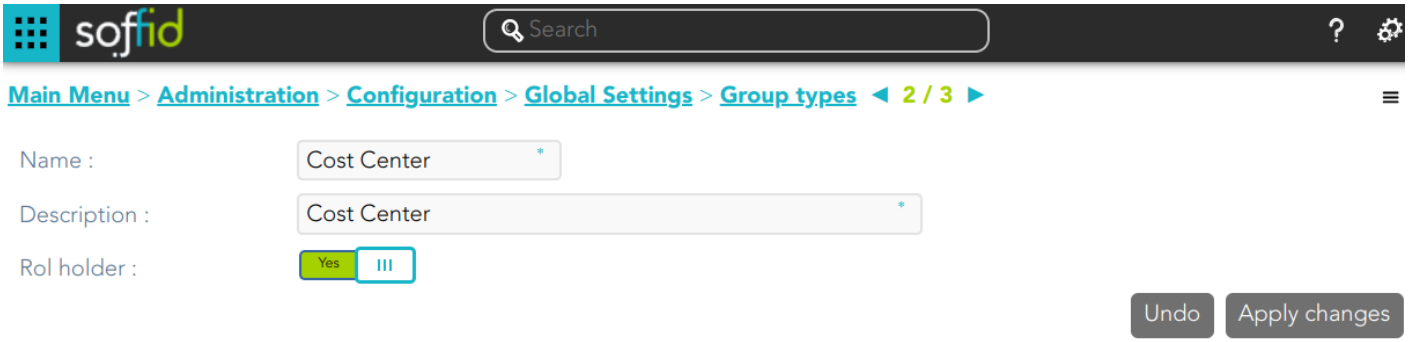

https://bookstack.soffid.com/books/soffid-3-reference-guide/page/group-type

2. Groups: Assign Groups to the organizational unit. Define groups with the appropriate group type.

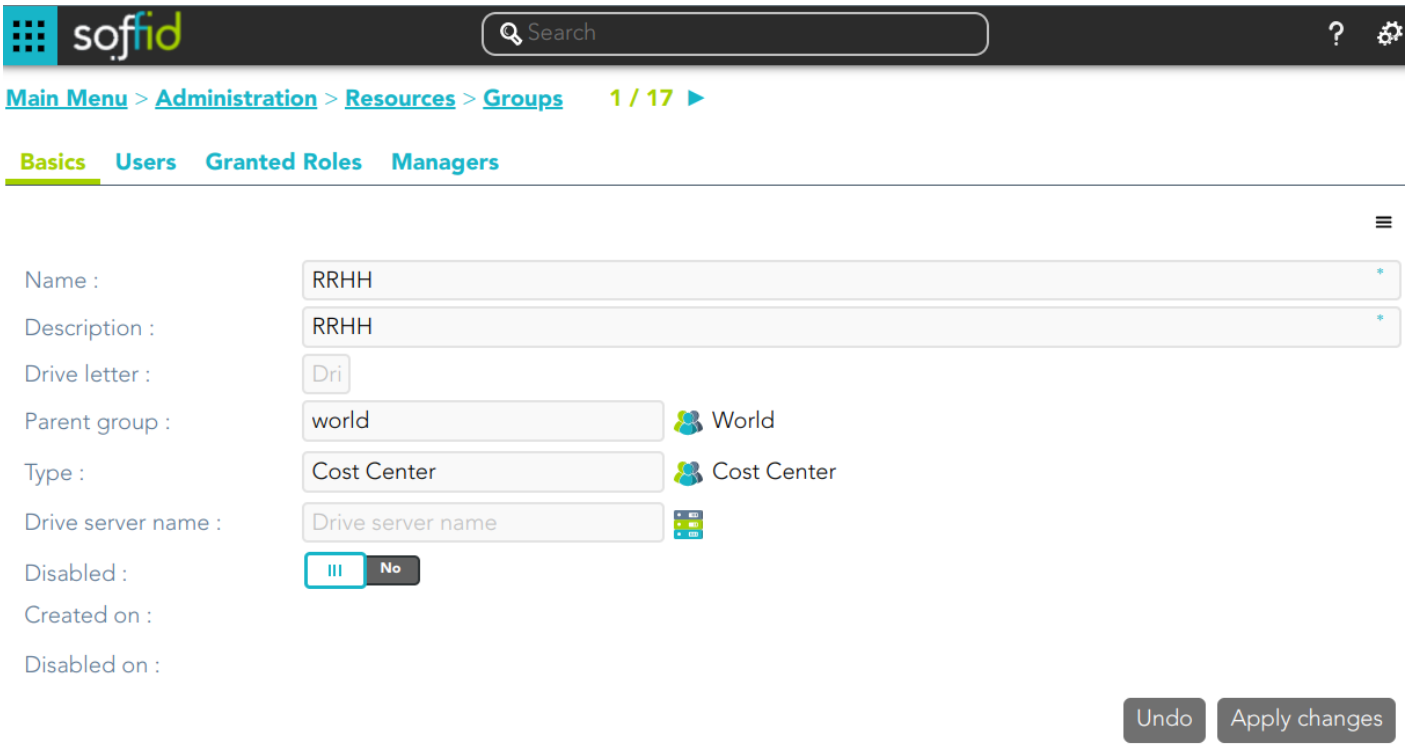


https://bookstack.soffid.com/books/soffid-3-reference-guide/page/groups


3. Custom attributes: (Optional) You can include new custom attributes to this membership relationship, go to Metadata page and select the GroupUser to add these attributes.

4. Attribute definition: Define the **Attributes to deliver** from the identity providers to the service providers

4.1. Holder group

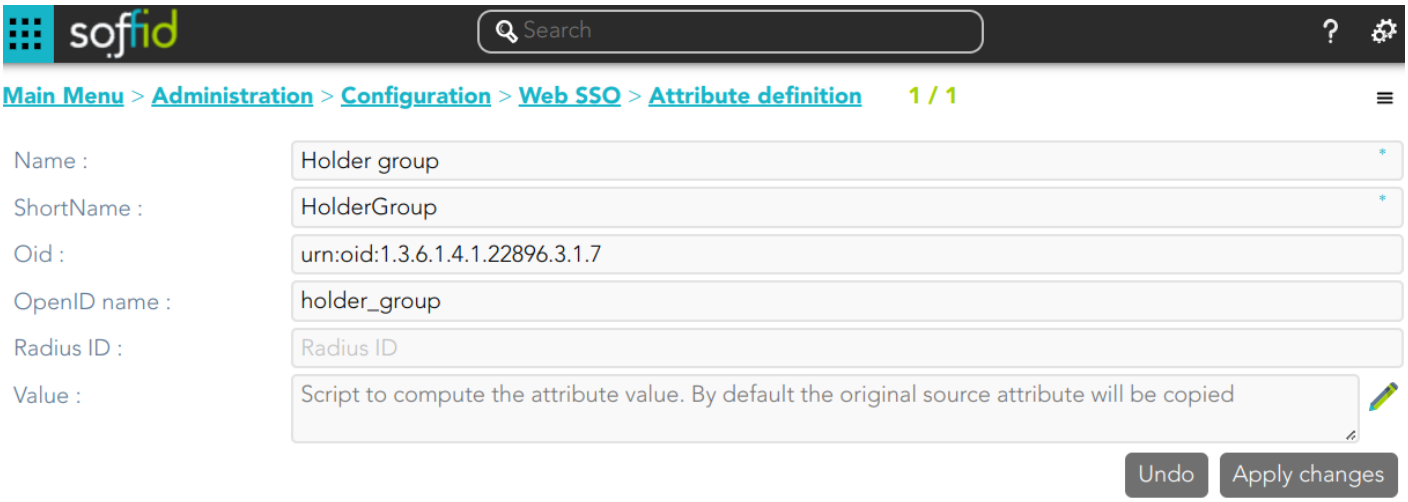


4.2. Role & group membership

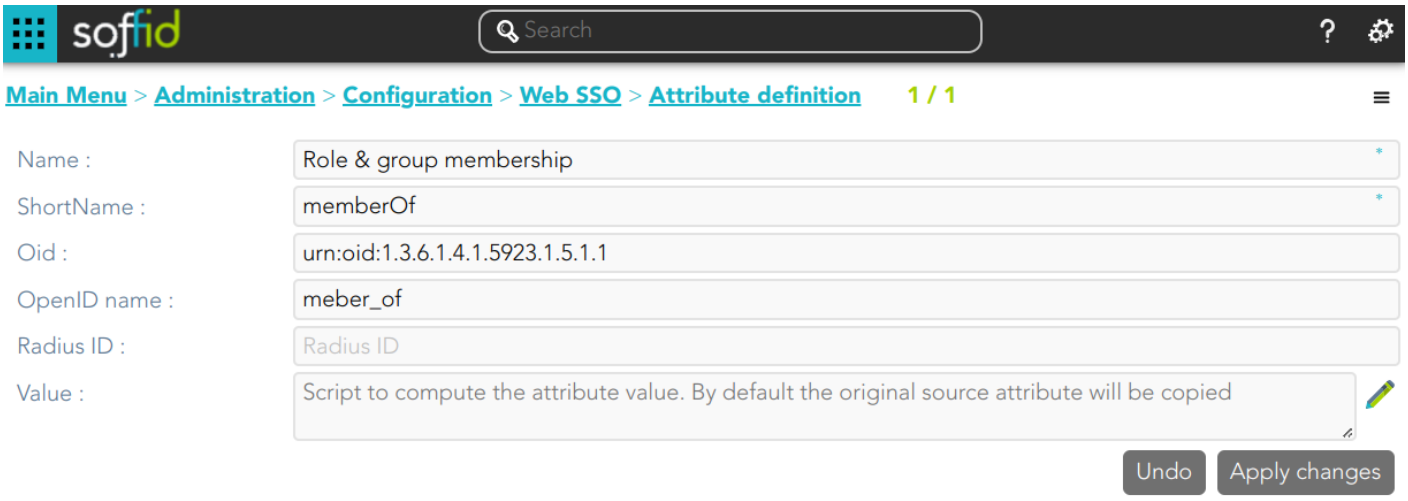


5. Attribute sharing policies: Define the policies to share the attributes with each service provider.

In this case, the Holder group, and Role & group membership attributes will be always shared.

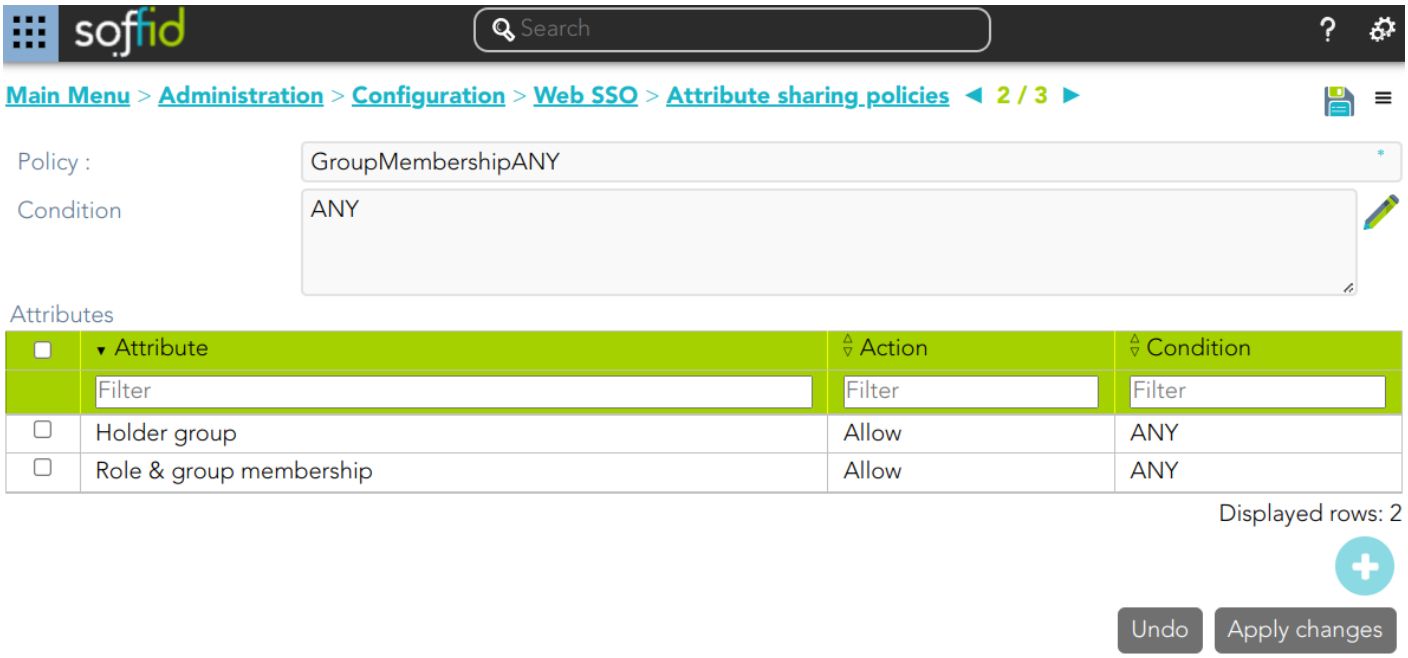

6. Service Provider: Configure the service providers, indicating in which ones the headline group should be requested

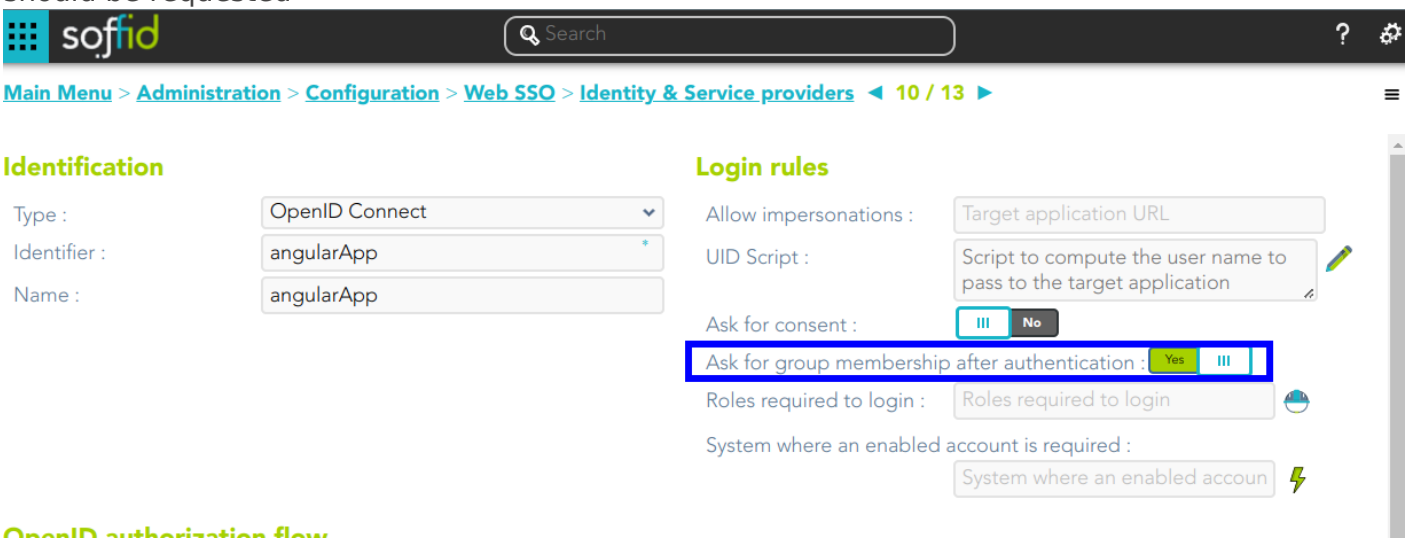

Revision #6
Created 16 January 2025 08:20:49
Updated 17 January 2025 10:08:14