


# Steps to configure

## Steps to configure

**1. Group type:** Create at least one organizational unit with the role holder attribute active (yes).

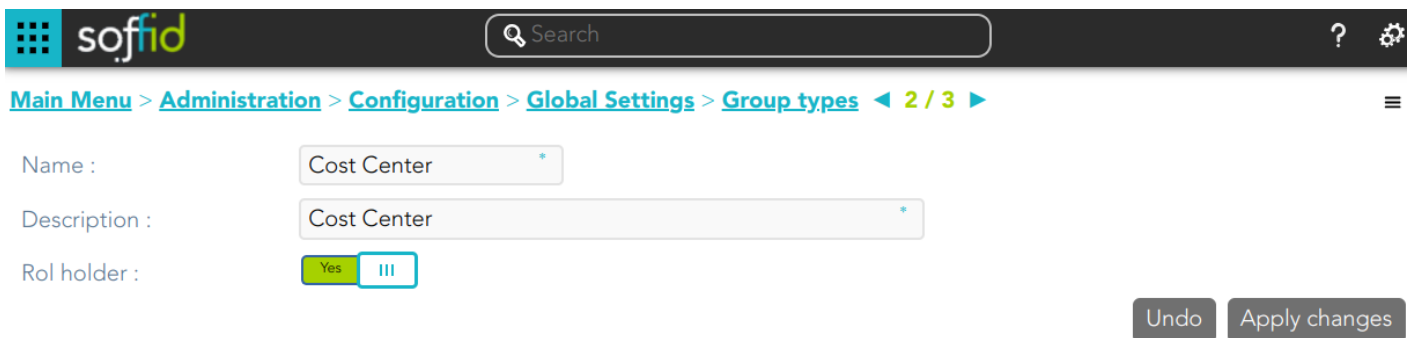

**soffid** Search ? ⚙️

Main Menu > Administration > Configuration > Global Settings > Group types < 2 / 3 >

Name : Cost Center \*


Description : Cost Center \*

Rol holder : Yes III

Undo Apply changes

<https://bookstack.soffid.com/books/soffid-3-reference-guide/page/group-type>

**2. Groups:** Assign Groups to the organizational unit. Define groups with the appropriate group type.

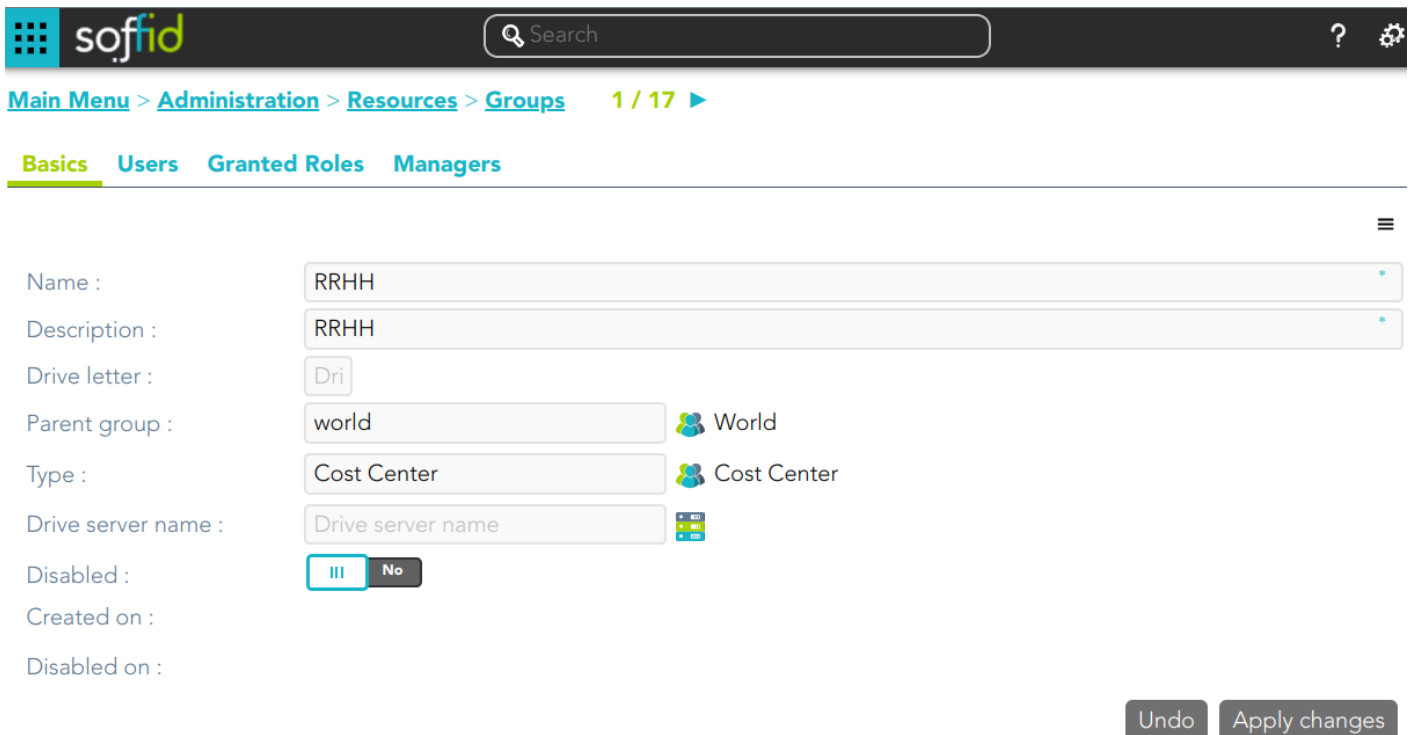

**soffid** Search ? ⚙️

Main Menu > Administration > Resources > Groups 1 / 17 >

Basics Users Granted Roles Managers

Name : RRHH \*

Description : RRHH \*

Drive letter : Dri

Parent group : world World

Type : Cost Center Cost Center

Drive server name : Drive server name

Disabled : III No

Created on :

Disabled on :


Undo Apply changes

<https://bookstack.soffid.com/books/soffid-3-reference-guide/page/groups>

**3. Custom attributes:** (Optional) You can include new custom attributes to this membership relationship, go to Metadata page and select the GroupUser to add these attributes.

**4. Attribute definition:** Define the **Attributes to deliver** from the identity providers to the service providers

#### 4.1. Holder group

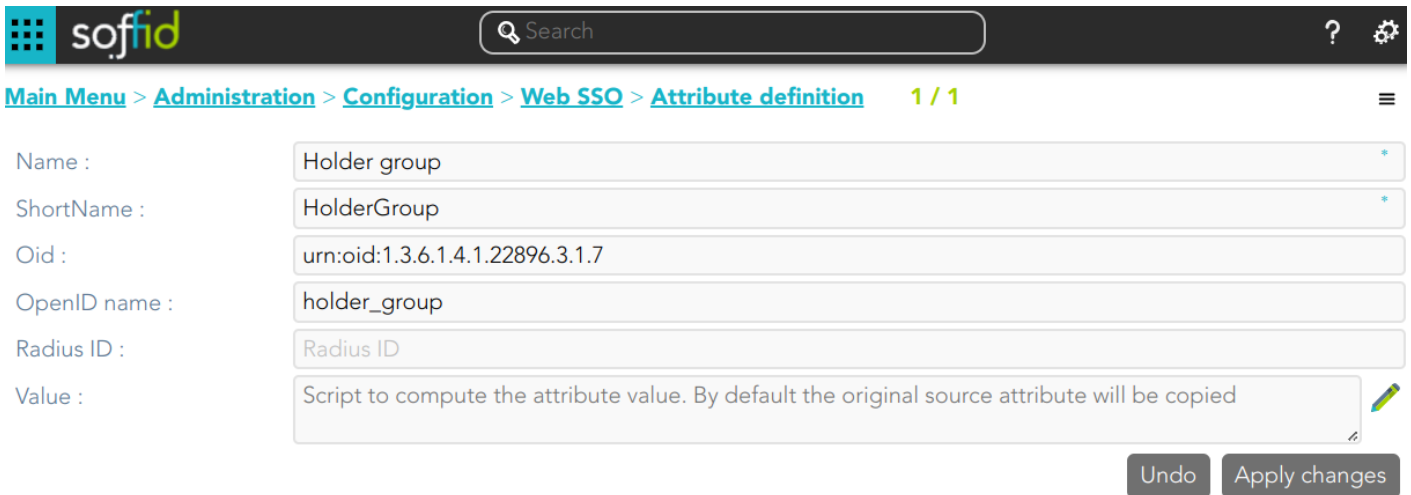


The screenshot shows the soffid web interface. The top navigation bar includes the soffid logo, a search bar, and a settings icon. The breadcrumb trail is: Main Menu > Administration > Configuration > Web SSO > Attribute definition 1 / 1. The form contains the following fields:

Name :	Holder group *
ShortName :	HolderGroup *
Oid :	urn:oid:1.3.6.1.4.1.22896.3.1.7
OpenID name :	holder_group
Radius ID :	Radius ID
Value :	Script to compute the attribute value. By default the original source attribute will be copied

Buttons: Undo, Apply changes

#### 4.2. Role & group membership

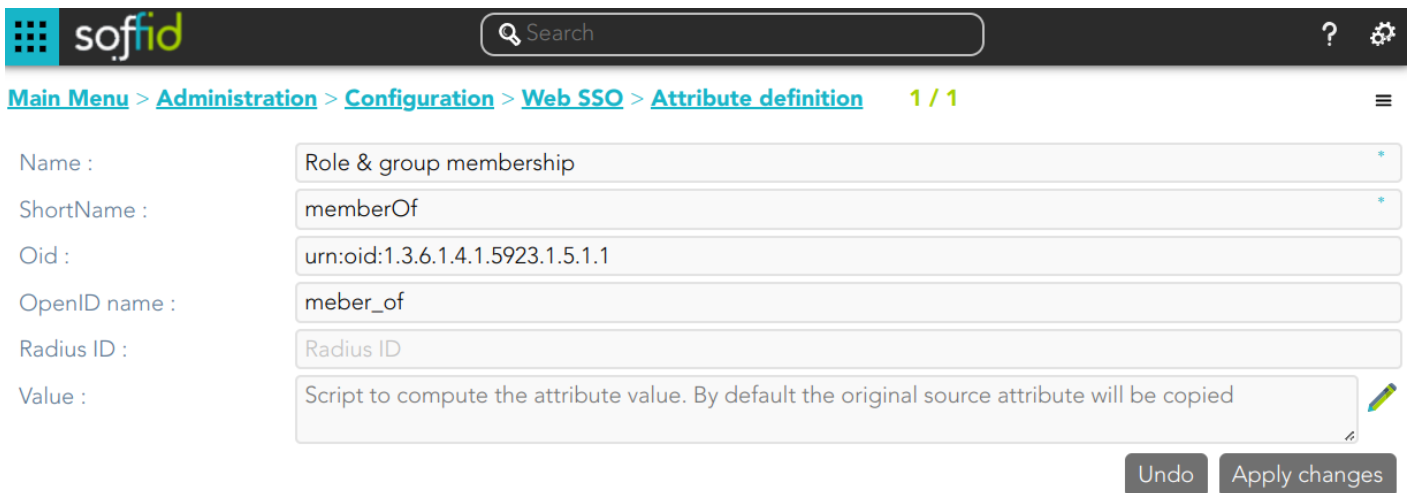

The screenshot shows the soffid web interface. The top navigation bar includes the soffid logo, a search bar, and a settings icon. The breadcrumb trail is: Main Menu > Administration > Configuration > Web SSO > Attribute definition 1 / 1. The form contains the following fields:

Name :	Role & group membership *
ShortName :	memberOf *
Oid :	urn:oid:1.3.6.1.4.1.5923.1.5.1.1
OpenID name :	meber_of
Radius ID :	Radius ID
Value :	Script to compute the attribute value. By default the original source attribute will be copied

Buttons: Undo, Apply changes

**5. Attribute sharing policies:** Define the policies to share the attributes with each service provider.

In this case, the Holder group, and Role & group membership attributes will be always shared.

Policy : GroupMembershipANY

Condition : ANY

Attributes

<input type="checkbox"/>	Attribute	Action	Condition
<input type="checkbox"/>	Filter	Filter	Filter
<input type="checkbox"/>	Holder group	Allow	ANY
<input type="checkbox"/>	Role & group membership	Allow	ANY

Displayed rows: 2

**6. Service Provider:** Configure the service providers, indicating in which ones the headline group should be requested

Identification

Type : OpenID Connect

Identifier : angularApp

Name : angularApp

Login rules

Allow impersonations : Target application URL

UID Script : Script to compute the user name to pass to the target application

Ask for consent :  Yes  No

Ask for group membership after authentication :  Yes  No

Roles required to login : Roles required to login

System where an enabled account is required : System where an enabled account

OpenID authorization flow

Revision #6

Created 16 January 2025 08:20:49

Updated 17 January 2025 10:08:14