
Password vault

Description

Soffid provides a protected storage, to save and manage accounts for multiple applications, that is the Password vault. Here you can save the accounts and passwords to access to critical systems and to your applications as well. Password vault allows you to handle the access control list to these accounts. Sometimes these accounts can be used by a specific user or a set of users.

The accounts are organized in folders depending on the permission, and the criticality level, These accounts can be system accounts or user accounts.

The Password vault exposes a subset of accounts to some users. These accounts are available through the Self-services portal. You can visit [My applications page](#) for more information.

When a privileged account is being config, it will be able to assign a workflow or approval process to request in order to use that account. For more information visit the link [How to apply policies](#).

Users can be authorized to manage their own personal accounts, **sso:manageAccounts**. For more info visit the [Authorizations page](#).

Folders

In the password vault, two kinds of folders are used: **personal folders** and **shared folders**, which depend on the Owners configuration you define.

On one hand, each user has their own personal folder. Inside this folder, the user can create accounts. That account will not be shared with any other user.

On the other hand, the shared folders could be used or managed by the owner/manager/SSO users.

Accounts

Soffid allows you to create new accounts on a specific folder on the password vault page, to add a new account will be mandatory to fill in some attributes, like System, name, and login name. You can consult the existing accounts related to a folder. For each account, you can update or delete the account, view and set a password.

Also, you can create accounts on the [Account page](#) and assign the appropriate vault folder.

Soffid allows administrator users to configure a workflow to request permissions when a user try to change the password of a privileged account in the password vault. That process can be defined with the BPM Editor as an Account reservation type. For more information you can visit the [BPM Editor book](#).

Overview

<https://www.youtube.com/embed/QOyvGTXo9dQ?rel=0>

Related objects

1. [Accounts](#)

Standard attributes

Folder attributes

- **Folder detail**
 - **Name:** folder name which will be displayed in My Applications.
 - **Description:** folder description.
 - **PAM policy:** when using PAM system, you could choose the policy that will comply with for each folder. When you define a policy for a folder, that policy will apply to all accounts hanging from this folder. For more information you can visit the [Configure PAM page](#).
- **Owners:** allows you to handle the full privileged access control list.
 - **Owner users:** list of users who will be the folder owners.

- **Owner groups:** list of groups, whose users will be the owners of the folder.
- **Owner roles:** list of roles. Users who have been granted these permissions will be the owners of the folder.
- **Managers**
 - **Manager users:** list of users who can manage the folder. Those users can view the password depending on the password policy.
 - **Manager groups:** list of groups, whose users can manage the folder. Those users can view the password depending on the password policy.
 - **Manager roles:** list of roles. Users who have been granted these permissions can manage the folder. Those users can view the password depending on the password policy.
- **SSO users**
 - **Granted users:** list of users who can use the account of that folder.
 - **Granted groups:** list of groups, whose users can manage the account of that folder
 - **Granted roles:** list of roles. Users who have been granted these permissions can manage the account of that folder.
- **Browse folder**
 - **Users:** list of users who can browse the folder, but can not perform any action.
 - **Groups:** list of groups, whose users can browse the folder, but can not perform any action.
 - **Roles:** list of roles. Users who have been granted these permissions can browse the folder, but can not perform any action.

Accounts attributes

Actions Tab


This tab shows the read-only attributes of the user account:

- **Name:** user account name.
- **Description:** a brief description.
- **System:** target system to which the account will be connected.
- **Login name:** login name to connect to the target system.
- **Login URL:** URL to connect.
- **In use by:** user name who is using that account.

Also, this tab allows you to launch the connection to the target system, view the password, set the password to launch the connection, and unlock the use of that account. All those options depend on the account definition and user privileges.

Basics Tab

This tab displays all the account attributes and allows you to update the account configuration.



Actions

Folders query actions

Query	Allows you to query folders through, only Quick search is available.
Add new	Allows you to create a new folder. You can choose that option on the hamburger menu or by clicking the add button (+). To add a new folder it will be mandatory to fill in the required fields. A folder needs to have, at less, an owner to manage it.

Folder actions

Apply changes	Allows you to save a new folder or update an existing folder. To save the data it will be mandatory to fill in the required fields. Be in mind that is important to indicate who are the owners of the folder.
Undo	Allows you to quit without saving any change made.
Delete	Allows you to delete a folder if you have the right permissions. To delete a folder you can click on the hamburger icon and then click the delete button (trash icon). Soffid will ask you for confirmation to perform that action, you could confirm or cancel the operation.

Account actions

Apply changes	Allows you to save a new account. To save the data it will be mandatory to fill in the required fields. Be in mind that is important to indicate who are the owners of the folder. If the account exists on the system, you can assign the vault folder to the account window .
Undo	Allows you to quit without saving any change made.
Delete	Allows you to delete an account from a folder if you have the right permissions. To delete a host you can click on the hamburger icon and then click the delete button (trash icon). Soffid will ask you for confirmation to perform that action, you could confirm or cancel the operation.


Set password

This option depends on the credential type selected.

Password:

- Allows you to set a new password to the account or a SSH key.
- The password can be generated automatically, or you can set the password.
- It will be mandatory the password complies with the Password policies defined for the domain.
- If an account is unmanaged, the password will not be sent to the target system.

Image

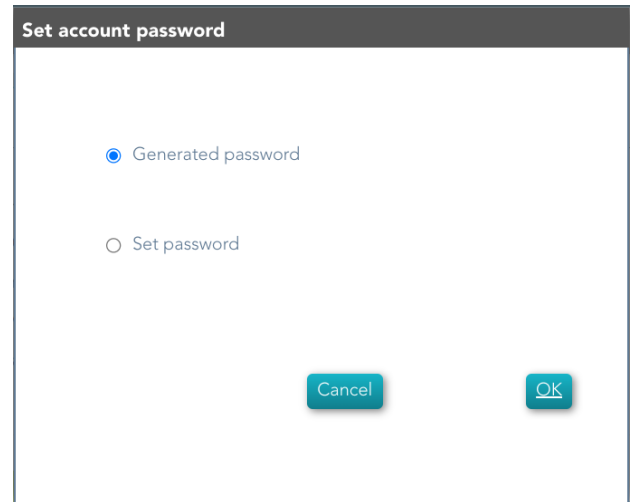


The screenshot shows a dialog box titled "Set account password". It contains two radio button options: "Generated password" (which is selected) and "Set password". At the bottom right, there are two buttons: "Cancel" and "OK".

SSH key:

- Allows you to generate a new key or enter an existing key.

Image

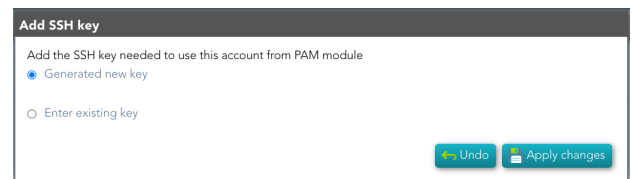


The screenshot shows a dialog box titled "Add SSH key". It contains the text "Add the SSH key needed to use this account from PAM module" and two radio button options: "Generated new key" (which is selected) and "Enter existing key". At the bottom right, there are two buttons: "Undo" and "Apply changes".

Kubernetes key:

- Allows you to add a YAML descriptor

Image

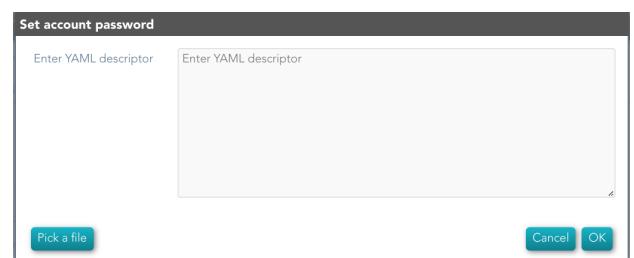

The screenshot shows a dialog box titled "Set account password". It contains two text input fields, both labeled "Enter YAML descriptor". At the bottom left, there is a button labeled "Pick a file". At the bottom right, there are two buttons: "Cancel" and "OK".

How to apply policies

Soffid allows you to define policies and rules to apply to a specific folder or a set of folders. To do that is needed to install the XACML add-on and configure the proper policies and rules.

Also, you can configure a workflow or approval process to request in order to use accounts saved on a folder.

It is mandatory to enable the Password Vault PEP and populate the information about the XACML policy set and the version which applies.

Example

XACML PEP config

It is mandatory to enable the Password Vault PEP and populate the information about the XACML policy set and the version which applies.

Password Vault:

⊖ VaultDemoPolicies (1)	Vault polices
⊕ demoFolder (1)	Policies for demoFolder
⊕ UserRestrictions (1)	Restrictions to a specific user

[New policy Set](#) [New policy](#) [New policy reference](#) [New policy set reference](#)

XACML PEP config:

Password vault Policy Enforcement Point (<https://iam-sync-lab.soffidnetlab:1760//XACML/vault>)

Enable XACML Policy Enforcement Point : Yes No

Policy Set Id :

Policy Set Version :

Trace requests : Yes No

XACML Policy Management

You need to configure the access to the folder "VaultFolder", that folder can contain other folders and accounts. It will be mandatory to configure the access list, who are the owners, managers, and so on. You need to know if you need to configure the control access list by accounts, by folders, or both.

⊖ demoFolder	demoFolder
soffid	administrator
patricia	patricia
⊕ subFolderDemo	subFolderDemo

[Create new folder](#)
[Create new account](#)

For instance, the policies you need to implement are the following:

1. Only users between 6:00 and 18:00 could use the accounts inside the "demoFolder".

Policy

Identifier : TimeToAccess
Version : 1
Description : Time to access to the resources
Rule Combining Algorithm : Permit overrides

Target

Subjects	Operator	Value	+	Resources	Operator	Value	+
Displayed rows: 0				Displayed rows: 0			
Actions	Operator	Value	+	Environments	Operator	Value	+
Displayed rows: 0				Displayed rows: 0			

Variables

Variable	Expression	+
Displayed rows: 0		

Rules

Rule	Description	Effect
<input type="checkbox"/> LabourTime	Labour Time	Permit
<input type="checkbox"/> Other	Other Deny	Deny

Displayed rows: 2

Obligations

Obligation	Full fill on	Attribute	Value	+
Displayed rows: 0				

Undo Apply changes

Rule

Rule : LabourTime
Description : Labour Time
Effect : Permit

Target

Subjects	Operator	Value	+	Resources	Operator	Value	+
Displayed rows: 0				Displayed rows: 0			
Actions	Operator	Value	+	Environments	Operator	Value	+
Displayed rows: 0				Displayed rows: 0			

Conditions

Condition	Expression	+
<input type="checkbox"/> Between 6:00 and 20:00	((One and only(Current time) > "6:00:00") && (One and only(Current time) < "20:00:00"))	+
Displayed rows: 1		

Undo Close

2.- User "bob" never could use the accounts of demoFolder.

Policy

Identifier:

Version:

Description:

Rule Combining Algorithm:

Target

<input type="checkbox"/>	Subjects	Operator	Value	+	<input type="checkbox"/>	Resources	Operator	Value	+
Displayed rows: 0					Displayed rows: 0				
<input type="checkbox"/>	Actions	Operator	Value	+	<input type="checkbox"/>	Environments	Operator	Value	+
Displayed rows: 0					Displayed rows: 0				

Variables

<input type="checkbox"/>	Variable	Expression	+
Displayed rows: 0			

Rules

<input type="checkbox"/>	Rule	Description	Effect
<input type="checkbox"/>	DenyAccess	Deny access to a user	Deny
<input type="checkbox"/>	Other	Permit Other	Permit

Displayed rows: 2

Obligations

<input type="checkbox"/>	Obligation	Full fill on	Attribute	Value	+
Displayed rows: 0					

Rule UserRestrictionsPolicy

Rule:

Description:

Effect:

Target

<input type="checkbox"/>	Subjects	Operator	Value	+	<input type="checkbox"/>	Resources	Operator	Value	+
<input type="checkbox"/>	urn:com:soffid:xacml:subject:user	=	bob	+	Displayed rows: 0				
Displayed rows: 1					Displayed rows: 0				
<input type="checkbox"/>	Actions	Operator	Value	+	<input type="checkbox"/>	Environments	Operator	Value	+
Displayed rows: 0					Displayed rows: 0				

Conditions

<input type="checkbox"/>	Condition	Expression	+
Displayed rows: 0			

3. Users with result permits, need the authorization to use the accounts.

You need to config the workflow that will be called, to config you need to include the bpm obligation on the policy. Also, you can include a message to the user, or other obligations.

Policy

Identifier:

Version:

Description:

Rule Combining Algorithm:

Target

<input type="checkbox"/>	<input type="text" value="Subjects"/>	<input type="text" value="Operator"/>	<input type="text" value="Value"/>	+	<input type="checkbox"/>	<input type="text" value="Resources"/>	<input type="text" value="Operator"/>	<input type="text" value="Value"/>	+
Displayed rows: 0					Displayed rows: 0				
<input type="checkbox"/>	<input type="text" value="Actions"/>	<input type="text" value="Operator"/>	<input type="text" value="Value"/>	+	<input type="checkbox"/>	<input type="text" value="Environments"/>	<input type="text" value="Operator"/>	<input type="text" value="Value"/>	+
Displayed rows: 0					Displayed rows: 0				

Variables

<input type="checkbox"/>	<input type="text" value="Variable"/>	<input type="text" value="Expression"/>	+
			Displayed rows: 0

Rules

<input type="checkbox"/>	<input type="text" value="Rule"/>	<input type="text" value="Description"/>	<input type="text" value="Effect"/>	+
<input type="checkbox"/>	Other	Other	Deny	
<input type="checkbox"/>	Labourtime	Labour time	Permit	
				Displayed rows: 2

Obligations

<input type="checkbox"/>	<input type="text" value="Obligation"/>	<input type="text" value="Full fill on"/>	<input type="text" value="Attribute"/>	<input type="text" value="Value"/>	+
<input type="checkbox"/>	urn:soffid:obligation:message	Permit	text	This is a protected system. Do not enter without authorization, please.	
<input type="checkbox"/>	urn:soffid:obligation:bpm	Permit	process	Grant account	

Visit the [XACML Book](#) for more information.

Visit the [BPM Editor Book](#) for more information.

Revision #3

Created 16 August 2021 13:19:05

Updated 1 December 2022 12:02:54